



## APPLICATION

The HUF 1500 DUO is a high-quality filtration unit that cleans air of dust. It is intended for rooms where finishing works are carried out, e.g. plastering or sanding.

## CONSTRUCTION

Housing made of aluminium. Equipped with two fans to increase air flow and with a work time counter. Contains wheels and built-in lifting handles for easy movement and transportation.

It is equipped with two filters: a G3-class\* prefilter and H14-class\* HEPA filter. The HEPA filter removes at least 99,995% of particles from the air (tested at 0,3 micron). A light on the housing indicates when a filter change is required.

## ELECTRIC MOTOR

Single phase 230V 50Hz electric motors assembled on each fan. The motors are made in accordance with the applicable directives and efficiency classes, and marked with the CE mark. Insulation class - F. Protection class - IP44.

\*The filtration efficiency of the filters used in the device is defined by the standards PN-EN 779, PN-EN 1822-1, PN-EN 1822-4




## TECHNICAL CHARACTERISTICS

Type	airflow max	max absorbed power	current	voltage	sound pressure level*	weight	article number
	[m <sup>3</sup> /h]	[W]	[A]	[V]	[dB(A)]	[kg]	
HUF 1500 DUO	1480	556	2,4	230	64-74	37	70010629

\* sound pressure measured at a distance of 1,5m from the filtration unit. Max level measured in free blowing conditions (open outlet). Min level measured with ducted outlet with flexible pipe (diameter 315 mm).

## DIMENSIONS [mm]

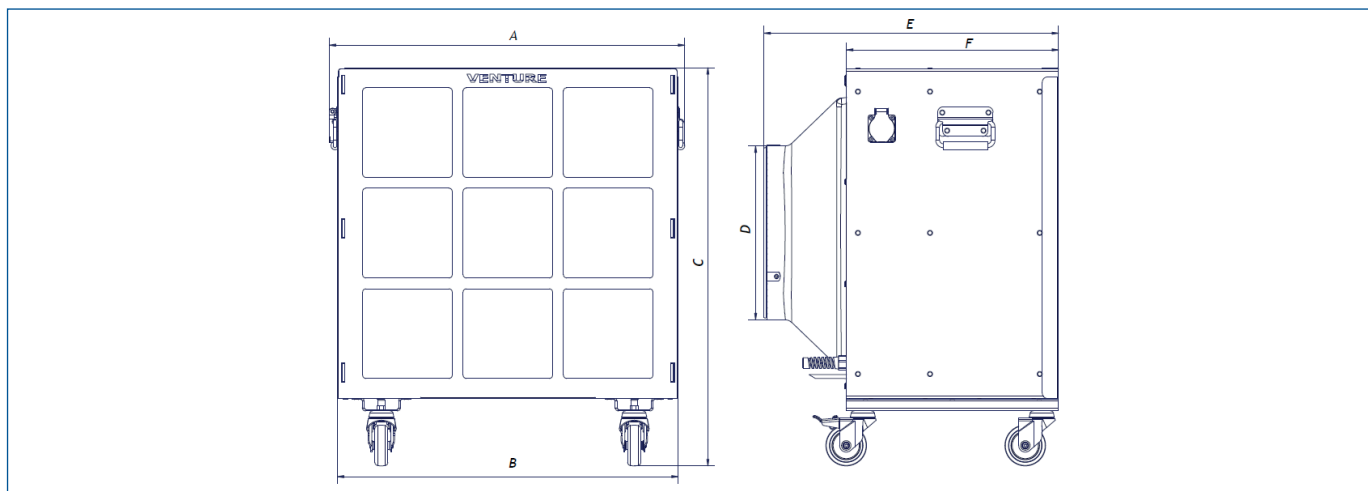

Type	A	B	C	D	E	F
HUF 1500 DUO	655	628	733	320	543	391